ALTHEA17W 3-Port 67W GaN USB PD Charger with USB-C Charging Cable, USB-C x 2, USB-A x 1, QC 3.0, PPS, PD 3.0

Product Images

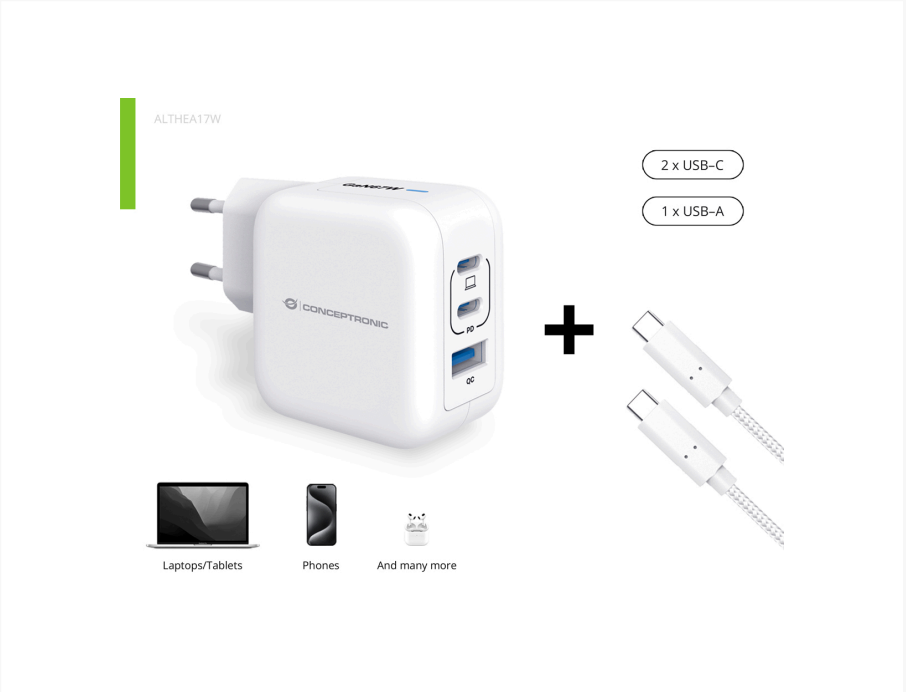





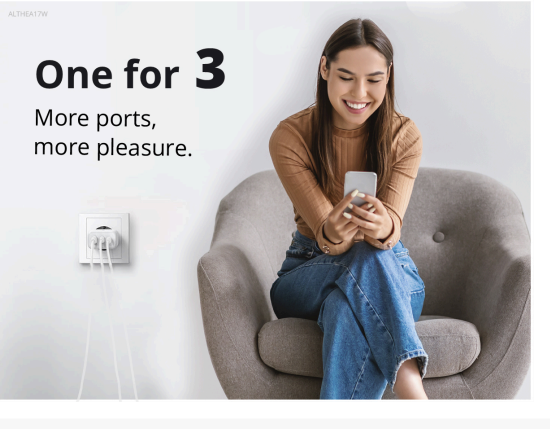

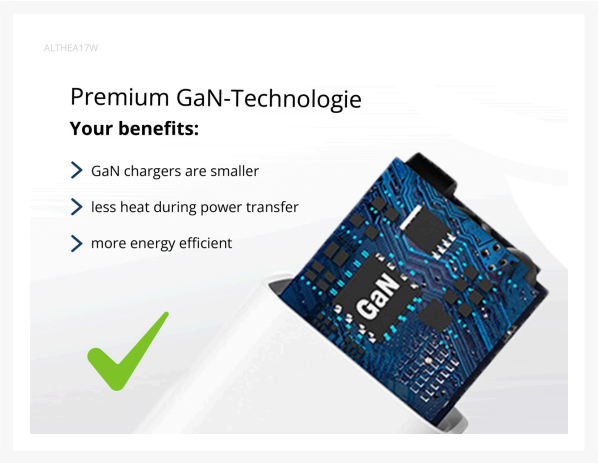

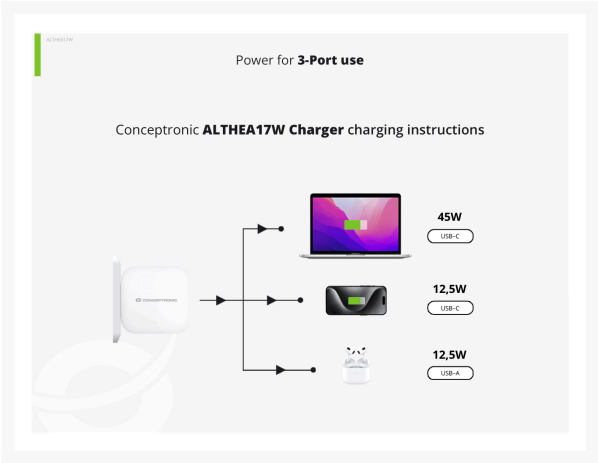

Short Description

- **High-Power GaN Technology:** This charger utilizes advanced Gallium Nitride (GaN) technology, providing up to 67W of total power for faster and more efficient charging.
- **Versatile Port Selection:** Equipped with 3 ports including 2 USB-C ports (with PD 3.0) and 1 USB-A ports (with QC 3.0), allowing simultaneous charging for multiple devices with varying power requirements.
- **Wide Compatibility:** Supports a range of output options from 3.3V to 20.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.

- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.
- **Included USB Cable:** Comes with a 1.5m 3.0A USB-C to USB-C cable for convenience and versatility.

Description

Conceptronic ALTHEA17W Wall Charger with Cable
2 x USB-C
1 x USB-A
Laptops/Tablets
Phones
And many more
67W maximum charge
One for 3
Premium GaN-Technologie
Faster charging
Ports
1 x USB Type A
2 x USB Type C
Power for 3-Port use
Conceptronic
ALTHEA17W Charger
charging instructions
45W
USB-C
12,5W
USB-C
12,5W
USB-A
MacBook Air 13" 2022
only 2 hours
Our 100%
Other 68%
67W
faster charging
Compact Size
54 mm
54 mm
32 mm
Dimensions (W x D x H)
54 x 54 x 32 mm
One for 3
More ports,
more pleasure.
Premium GaN-Technologie
Your benefits:
GaN chargers are smaller
less heat during power transfer
more energy efficient
GaN
Power for 1-Port use
PD 67W
PD 20W
18W
2 x USB-C
1 x USB-A
Power for 2-Port use
PD 45W
PD 20W
PD 45W
QC 18W
7,5W
7,5W
2 x USB-C
1 x USB-A
Universal compability
Laptop
MacBook Pro
MacBook Air
Dell XPS 13
Tablet
iPad Pro / Air / Mini
Galaxy Tab S8 / S7 / A8
Smartphone
iPhone
HUAWAI Mate 60 Series
Galaxy
Google Pixel
And many more
AirPods / DJI / Canon / Gaming

This charger features cutting-edge Gallium Nitride (GaN) technology, delivering up to 67W of total power for faster and more efficient charging. It includes 3 versatile ports: 2 USB-C ports with USB Power Delivery (PD) 3.0 and 1 USB-A port with Quick Charge (QC) 3.0, allowing you to charge multiple devices simultaneously with varying power requirements. The charger supports output options ranging from 3.3V to 20.0V across its ports, ensuring broad compatibility with devices from smartphones to laptops. Enhanced safety features protect against overload, short circuiting, and overheating, safeguarding both the charger and connected devices. Additionally, it incorporates USB PD 3.0 and QC 3.0 technologies, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat. For added convenience, it comes with a 1.5m 3.0A USB-C to USB-C cable.

Additional Information

Number of outputs	3
USB Type-A ports quantity	1
Fast charging technology	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity	2
Programmable power supply (PPS) (YES/NO)	Yes
Housing Material	Polycarbonate (PC)
Number of simultaneously connected devices (max)	3
Port 1 Power Output	USB-C1 output: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.35A (PD); 3.3-11.0V/4.05A (PPS)
Port 2 Power Output	USB-C2 output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-11.0V/1.8A (PPS)
Port 3 Power Output	USB-A output: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
Cables included	USB Type-C
Power Plug Type	EU
Cable length	150 centimeter
Number of cartons per pallet	48 piece
Package volume	495 cubic_centimeter
Pallet net length	800 millimeter
Pallet net width	1200 millimeter
Pallet net height	1460 millimeter
Quantity per pack	1 piece
Package Depth	36 millimeter
Package Height	110 millimeter
Package Width	125 millimeter

Package Weight	29 gram
Harmonized System (HS) code	850440
Customs product code (TARIC)	8504408390
Quantity per pallet	1920 piece
Sustainability compliance	No
Approval and Compliance	CE, ERP, RoHS
Operating humidity	20% RH ~ 80% RH
Operating temperature	0°C ~ 35°C
Package Content	Quick installation guide, USB cable (C-C)
Storage humidity	10% RH ~ 90% RH
Storage temperature	-20°C ~ 80°C
Package Contents	ALTHEA17W 1.5m 3.0A USB-C to USB-C cable Multilingual quick installation guide
USB Power Delivery revision	3.0
Operating temperature (T-T) Max	35 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	90%
Storage relative humidity (H-H) Min	10%
Operating relative humidity (H-H) Max	80%
Operating relative humidity (H-H) Min	20%
Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius
Color	White
EAN	4015867236505
Model Number	ALTHEA17W
Maximum AC Input	240 volt
Minimum AC Input	100 volt
Input current	1.5 ampere

Maximum power	67 watt
Icecat_Power protection features	Over current, Over power, Short circuit
Product Height	32 millimeter
Product Width	54 millimeter
Product Depth	54 millimeter
Product Weight	128 gram
Power input	AC 100.0-240.0V, 1.5A max, 50-60Hz
Dimensions (W x D x H)	54 x 54 x 32 mm
Product weight (kg)	0.128