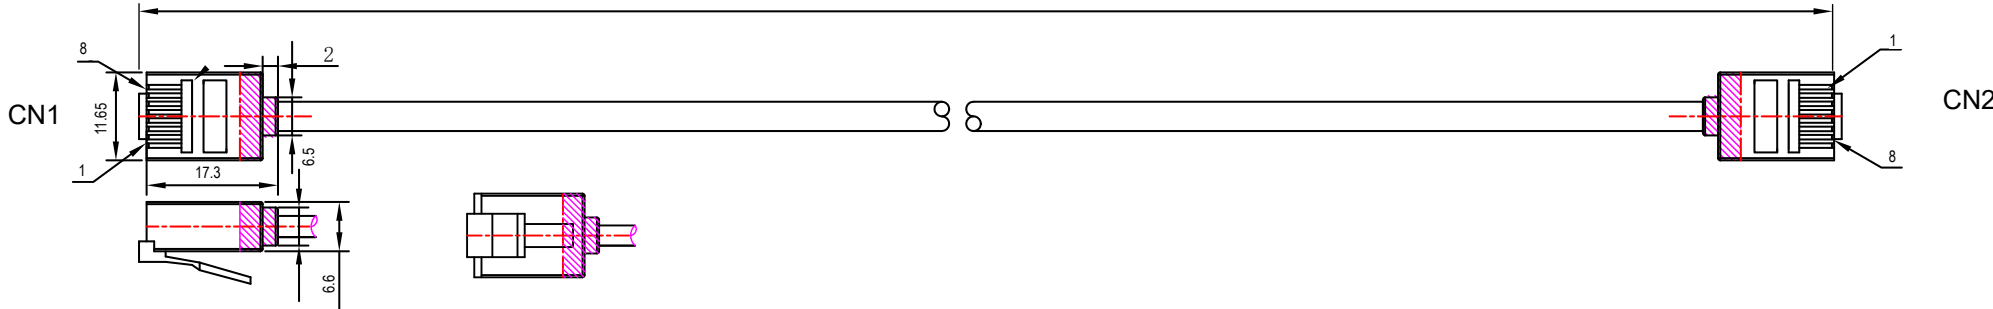
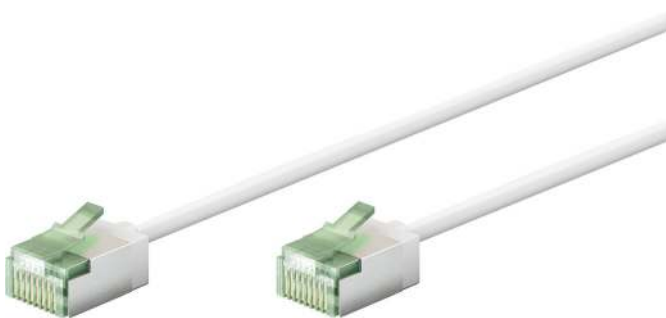
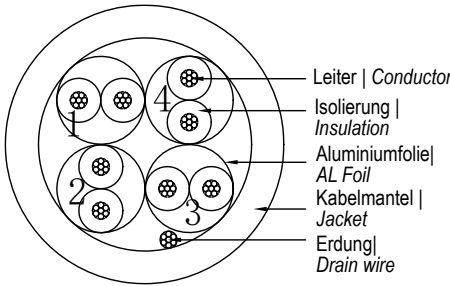


1	2	3	4	5	6	7	8	9	10	11	12	13	14																									
A	Länge / Length													A																								
B														B																								
C														C																								
D											<table><tr><th>Artikel Nr. Item no.</th><th>Beschreibung Description</th><th>Länge Length</th></tr><tr><td>74357</td><td>CAT 8.1-0015 U/FTP SLIM LSZH-TPE WEISS 0.15M</td><td>150 ± 10 mm</td></tr><tr><td>74358</td><td>CAT 8.1-0025 U/FTP SLIM LSZH-TPE WEISS 0.25M</td><td>250 ± 10 mm</td></tr><tr><td>74359</td><td>CAT 8.1-0050 U/FTP SLIM LSZH-TPE WEISS 0.5M</td><td>500 ± 20 mm</td></tr><tr><td>74360</td><td>CAT 8.1-0100 U/FTP SLIM LSZH-TPE WEISS 1M</td><td>1000 ± 30 mm</td></tr><tr><td>74361</td><td>CAT 8.1-0200 U/FTP SLIM LSZH-TPE WEISS 2M</td><td>2000 ± 30 mm</td></tr><tr><td>74362</td><td>CAT 8.1-0300 U/FTP SLIM LSZH-TPE WEISS 3M</td><td>3000 ± 50 mm</td></tr><tr><td>74363</td><td>CAT 8.1-0500 U/FTP SLIM LSZH-TPE WEISS 5M</td><td>5000 ± 100 mm</td></tr></table>			Artikel Nr. Item no.	Beschreibung Description	Länge Length	74357	CAT 8.1-0015 U/FTP SLIM LSZH-TPE WEISS 0.15M	150 ± 10 mm	74358	CAT 8.1-0025 U/FTP SLIM LSZH-TPE WEISS 0.25M	250 ± 10 mm	74359	CAT 8.1-0050 U/FTP SLIM LSZH-TPE WEISS 0.5M	500 ± 20 mm	74360	CAT 8.1-0100 U/FTP SLIM LSZH-TPE WEISS 1M	1000 ± 30 mm	74361	CAT 8.1-0200 U/FTP SLIM LSZH-TPE WEISS 2M	2000 ± 30 mm	74362	CAT 8.1-0300 U/FTP SLIM LSZH-TPE WEISS 3M	3000 ± 50 mm	74363	CAT 8.1-0500 U/FTP SLIM LSZH-TPE WEISS 5M	5000 ± 100 mm	D
Artikel Nr. Item no.	Beschreibung Description	Länge Length																																				
74357	CAT 8.1-0015 U/FTP SLIM LSZH-TPE WEISS 0.15M	150 ± 10 mm																																				
74358	CAT 8.1-0025 U/FTP SLIM LSZH-TPE WEISS 0.25M	250 ± 10 mm																																				
74359	CAT 8.1-0050 U/FTP SLIM LSZH-TPE WEISS 0.5M	500 ± 20 mm																																				
74360	CAT 8.1-0100 U/FTP SLIM LSZH-TPE WEISS 1M	1000 ± 30 mm																																				
74361	CAT 8.1-0200 U/FTP SLIM LSZH-TPE WEISS 2M	2000 ± 30 mm																																				
74362	CAT 8.1-0300 U/FTP SLIM LSZH-TPE WEISS 3M	3000 ± 50 mm																																				
74363	CAT 8.1-0500 U/FTP SLIM LSZH-TPE WEISS 5M	5000 ± 100 mm																																				
E														E																								
F	Verbindungen Connections CN 1 (568B) weiß white 1 orange orange 2 weiß white 3 grün green 6 blau blue 4 weiß white 5 weiß white 7 braun brown 8					Ultraflexibles CAT8.1 Patchkabel, slim, U/FTP, weiß - Superdünnes LAN-Kabel mit extrakurzen RJ45-Steckern für weniger Kabelvolumen im Serverschrank oder Patchpanel und dadurch eine optimierte Luftzirkulation - Mit Sicherheit flexibel: Ungeschirmt und mit raucharmem, halogenfreiem TPE-Mantel für einen besonders kleinen Biegeradius und hohe Flexibilität Anschlüsse: 2x RJ45-Stecker (8P8C) Material Kontakte: vergoldet Knickschutz: beidseitig Spezifikation: CAT 8.1 Schirmungsklasse: U/FTP Max. Bandbreite: 2000 MHz Kabeltyp: Rundkabel AWG: 32/7 Material Kabelmantel: LSZH-TPE Durchmesser Kabelmantel: 3.8 ± 0.2 mm Gehäusematerial: PVC, transparent grün Rastnasenschutz: beidseitig Kontaktierung: EIA/TIA-568B Biegeradius: > 25.4 mm					Ultra-Flexible CAT 8.1 Patch Cable, Slim, U/FTP, white - Super-thin LAN cable with extra-short RJ45 connectors for a reduced cable volume in the server cabinet or patch panel, resulting in optimised air circulation - Safe and flexible: Unshielded and with a low-smoke, halogen-free TPE jacket for a particularly small bending radius and high flexibility Connections: 2x RJ45 male (8P8C) Contacts: gold-plated Kink protection: both sides Specification: CAT 8.1 Shielding class: U/FTP Max. bandwidth: 2000 MHz Cable type: round cable AWG: 32/7 Cable sheath material: LSZH-TPE Cable sheath diameter: 3.8 ± 0.2 mm Housing material: PVC, transparent green Latch protection: both sides Contacting: EIA/TIA-568B Bending radius: > 25.4 mm			F																								
G														G																								
H														H																								
I	Änderungen Datum Name 09.08.2024 alw Norm:					Datum Name 17.06.2024 ir 24.07.2024 alw					Bezeichnung CAT 8.1-XXXX U/FTP SLIM LSZH-TPE WEISS XXXM Zeichnungs-Nr.: 74357ff			Blatt 1 von 1	I																							
J	Änderungen vorbehalten / Subject to change													J																								
1	2	3	4	5	6	7	8	9	10	11	12	13	14																									